

Nummax Manager

USER'S GUIDE



Local

INTRODUCTION	3
Fonctionnement	3
Se connecter à Nummax Manager Local.	3
Écran d'accueil	4
DIFFUSER DU CONTENU	5
CRÉER UNE LISTE DE DIFFUSION	6
Choix des contenus	7
Fichiers.	8
Texte sur une ligne	10
Texte multiligne	12
Afficher une horloge	13
Afficher une page web (URL).	14
Afficher un flux RSS	15
Afficher des données d'environnement	16
CONTROLLER VOTRE DIFFUSEUR	18
Contrôle de la luminosité	18
Q & R	19

OPERATION



Nummax Manager LOCAL is a free software stored in your Poster hardware for content broadcasting.

It is only accessible by connecting a computer (usb or wifi) to your Nummax display.

Contents and lists are saved in the memory but are neither editable nor programmable on a schedule.

LOG IN TO NUMMAX MANAGER LOCAL

To open the local software, open your web browser and enter the IP address in the URL address bar :

If you are connected by **WIFI**: 192.168.43.1

If you are connected by **USB** cable: 192.168.42.129

You must have previously connected your computer to your display (see the connection guide supplied with your Nummax equipment) and be **on the same network** (computer and your Nummax display).

CHOOSE NOW Nummax Manager AIO Cloud version



And access many features!

- ✓ Multi-display synchronization
- ✓ Media library
- ✓ Programmable playlists and commands
- ✓ Marketing report
- ✓ Full display control
- ✓ Customer account management
- ✓ Training and support
- ✓ And much more...

Call now


1-877-255-3471 ext 204

Send your request


Cloud@Nummax.com

HOME PAGE


1. Display name. Click on the pencil to change the name
2. Current playlist information and display storage capacity
3. Menu
4. Display control buttons for standby, wake-up and reboot
5. Screen capture refresh (Allows instant control of the broadcast in progress)
6. Regional settings of your display. Click on the pencil to change these settings

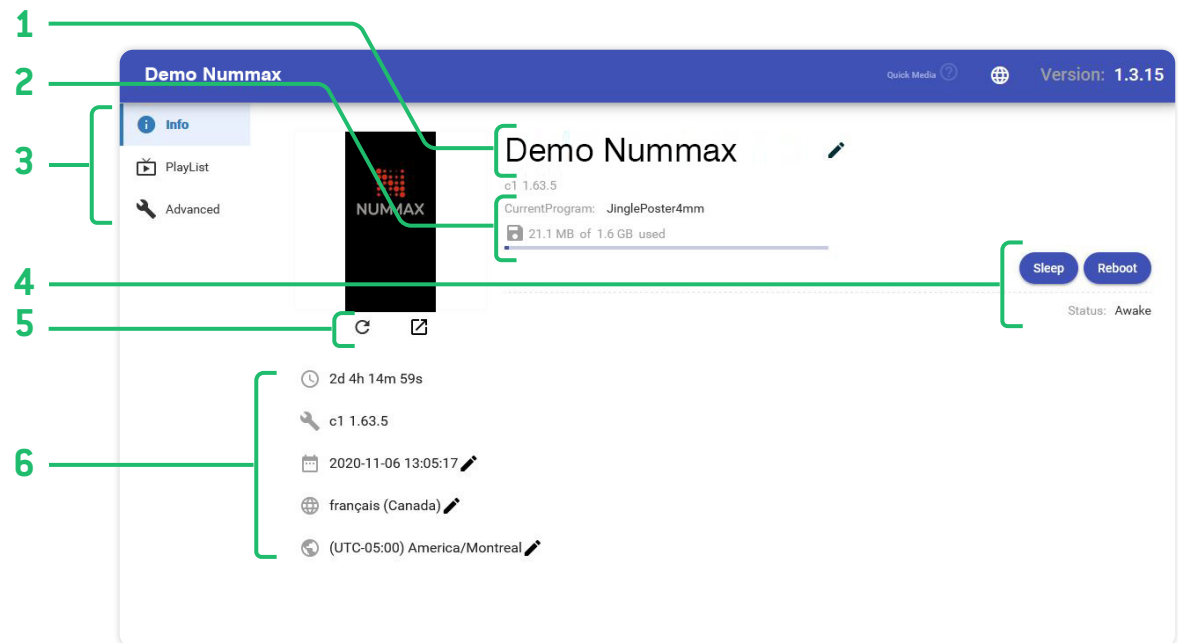

You can instantly broadcast content in your display with a simple **drag & drop** of your images and videos in the middle of the homepage.

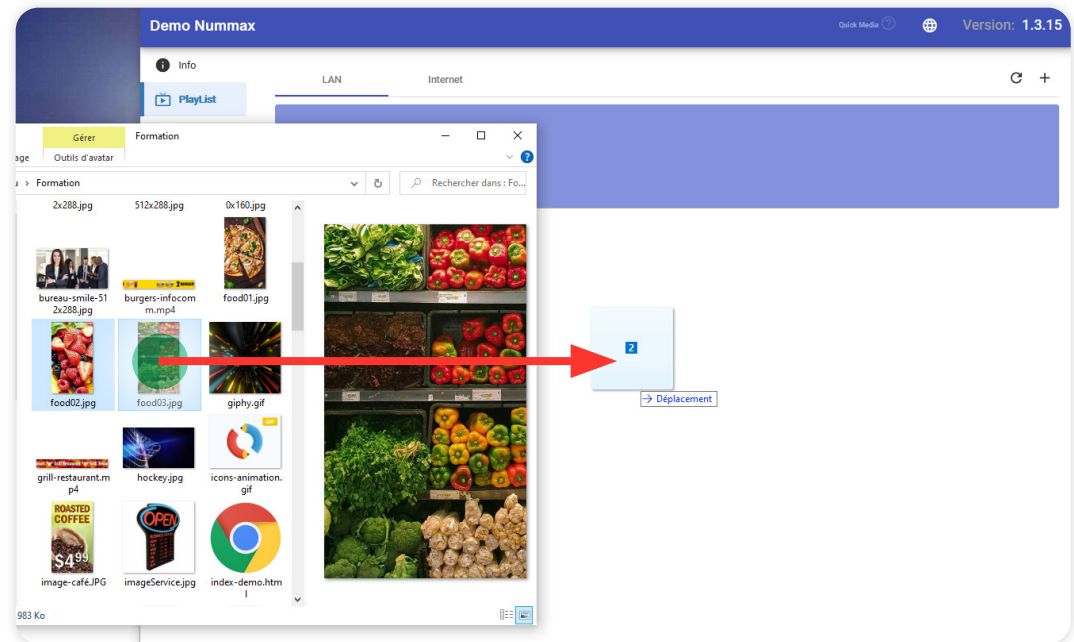

You must click the **Upload & Publish** after naming the playlist.

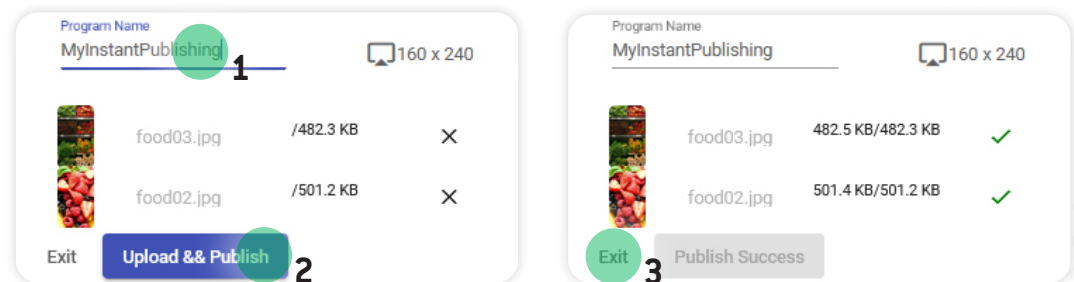

Only .jpg .png .bmp .gif images and .mp4 .mov and .wmv videos are accepted. No other formats are permitted (.pdf .ppt .doc .xls .psd .html .wmv .mov, ...)

Select **Playlist** in the left menu and **click on +** to create a new playlist.










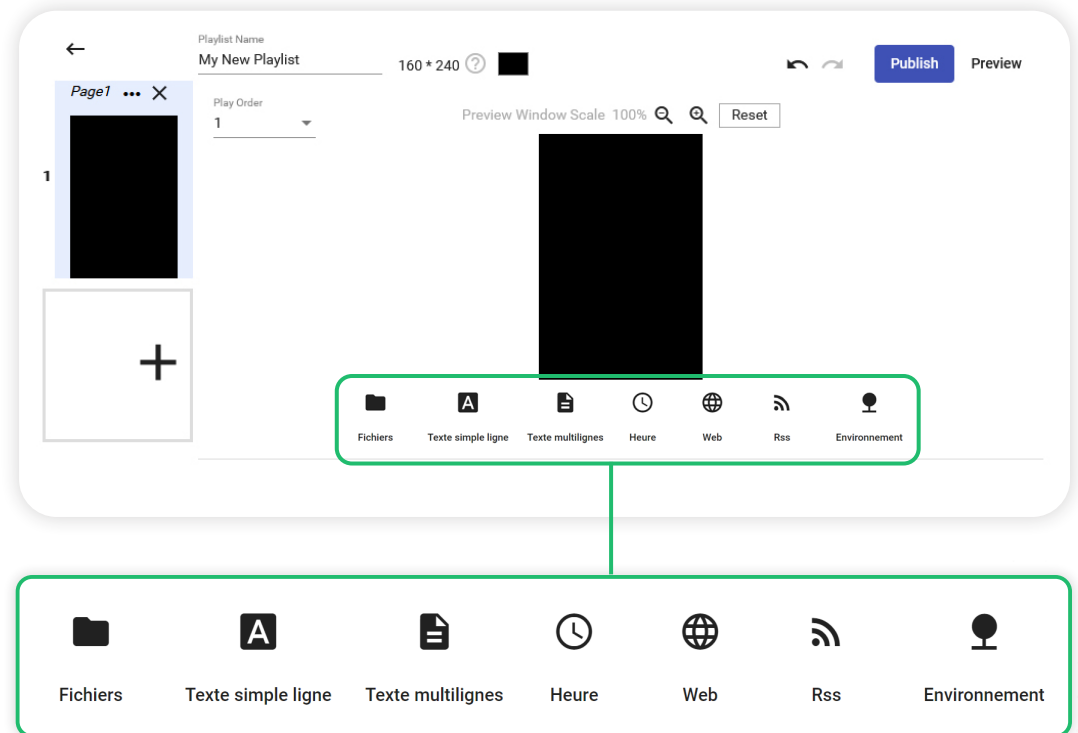
Rename your playlist and check that pixels size match your display matrix (pixel height and width of your Nummax display). Adjust accordingly to the size.




CONTENT SELECTION

Discover the selection of contents you can display.


-  Files (images and videos)
-  Single line text
-  Multi line text
-  Clock (date and time)
-  Web page (URL)
-  RSS feed
-  Environment data (sensors required)



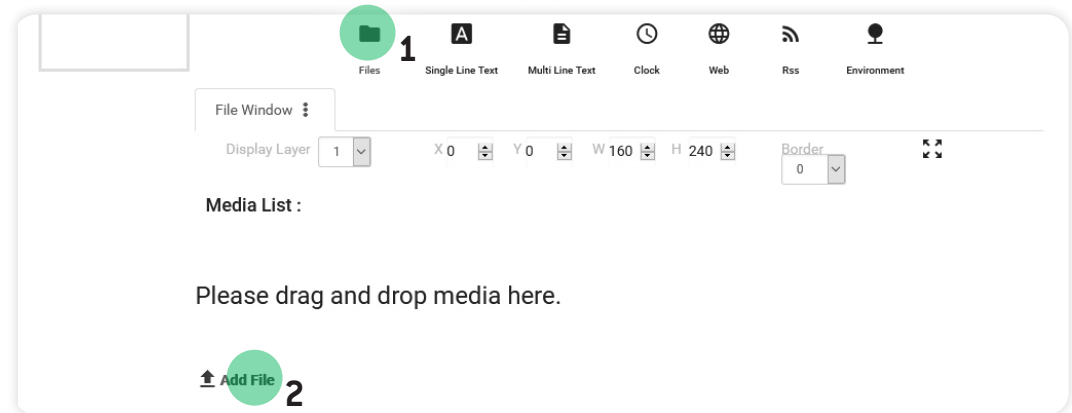


Files

To quickly create a slideshow, click **Files** then **Add File** to add your images. You can also **drag & drop** in the lower area from your computer.

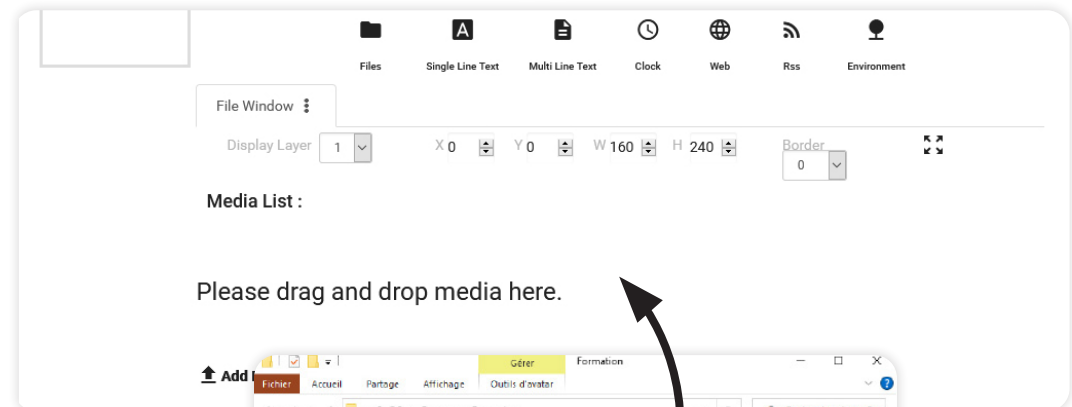

Please drag and drop media here.

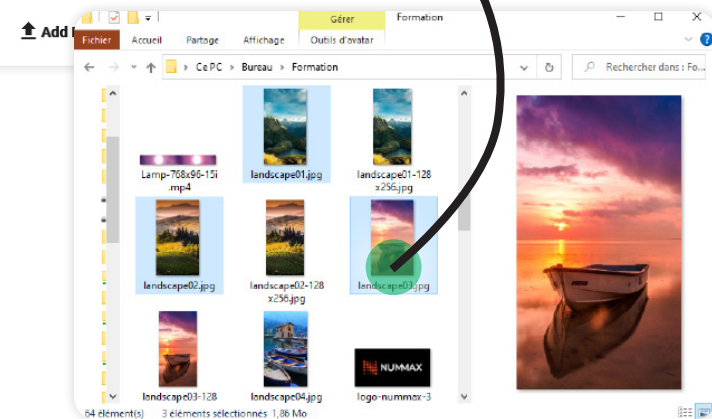

You can change images duration and click on **No effect** to add transitions.

Preview let you check the sequence before you click on **Publish** to broadcast in your Nummax display.


! Transitions between slides are not rendered in the preview. Transitions are only visible in the display broadcast.

Add a new sequence to the playlist

Change image duration

Add a transition

Preview the playlist
Publish in your display

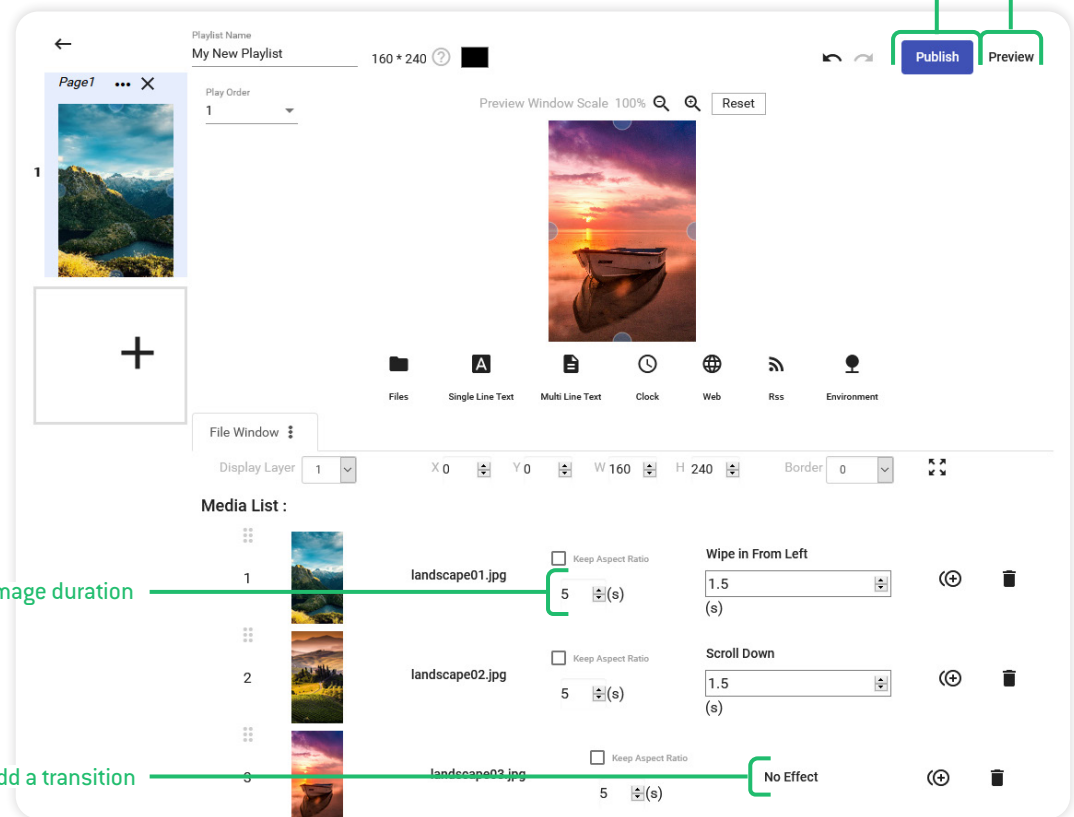

A Single line text

1. Add text

2. Input your text

3. Reveal options

Change the font

Add effects on text

Control display duration, scrolling, background color,...


When you add a content item to your slideshow, such as single-line text, a window block will be created. It is possible to move it in the display area and adjust the size of the frame. Options such as block size and adding a border are available.

The screenshot displays the Nummax Manager LOCAL interface for creating a playlist. The main area shows a preview of a slide with the word 'TRAVEL' overlaid on a sunset image. A green dashed box around the text is labeled 'Window block'. A green circle with a crosshair is positioned over the text, with a line pointing to the text 'Move the window block in the display area and adjust the block size'.

Below the preview, there is a toolbar with icons for 'Files', 'Single Line Text', 'Multi Line Text', 'Clock', 'Web', 'Rss', and 'Environment'. The 'Single Line Text' icon is selected, and a 'Single-Line Text Window' panel is open. This panel includes a 'Display Layer' dropdown set to '2', and input fields for 'X 0', 'Y 0', 'W 160', and 'H 64'. A 'Border' dropdown is set to '0'. Below these fields is a text input area containing the word 'TRAVEL'. A green line points from the text 'Window block adjustments' to the 'W 160' and 'H 64' fields. Another green line points from the text 'Add a border to the window' to the 'Border' dropdown.

At the bottom, there is a 'Font' section with a dropdown set to 'Arial', a 'Size(px)' dropdown set to '36', and buttons for 'B' (Bold), 'I' (Italic), and 'Color'. Below this is an 'Outline/Shadow' section with a note '(Require Player Ver>1.37.6)' and a dropdown. At the very bottom is an 'Effect' section with a dropdown.

Multi line text

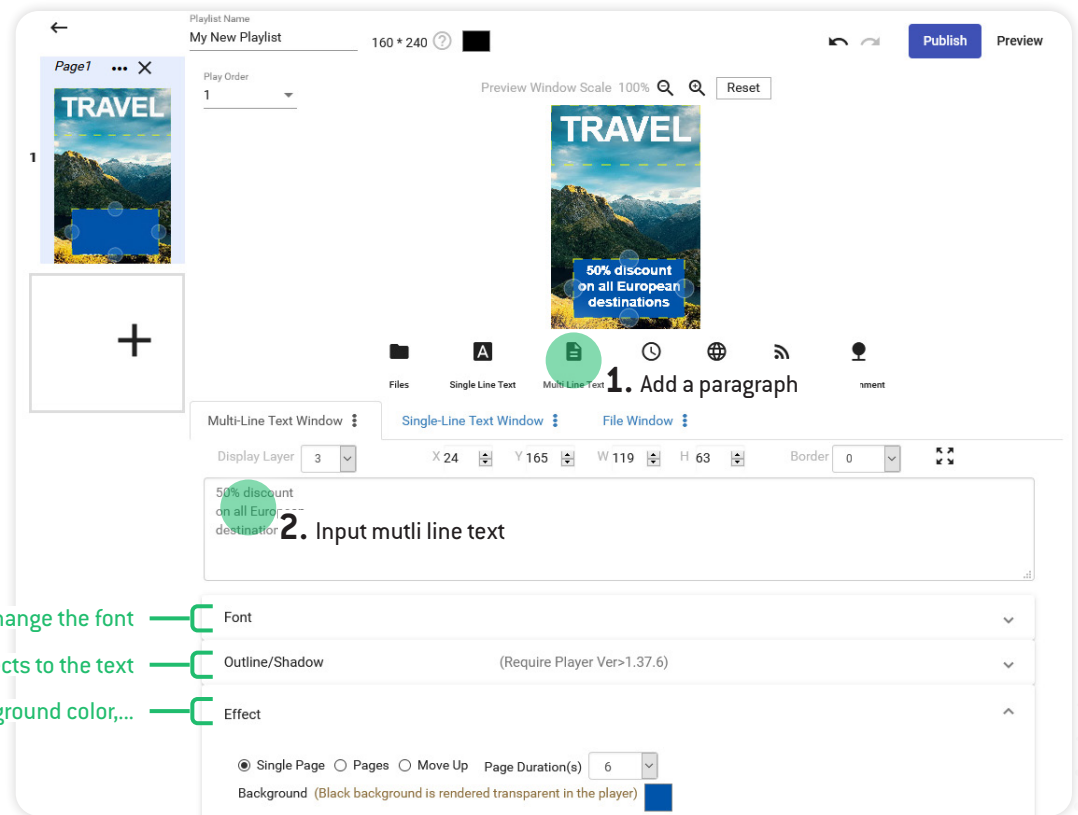

1. Add a paragraph

2. Input mutli line text

Change the font — Font


Add effects to the text — Outline/Shadow (Require Player Ver>1.37.6)

Control display duration, scrolling, background color,... — Effect

Single Page Pages Move Up Page Duration(s) 6

Background (Black background is rendered transparent in the player)

🕒 Display date and time

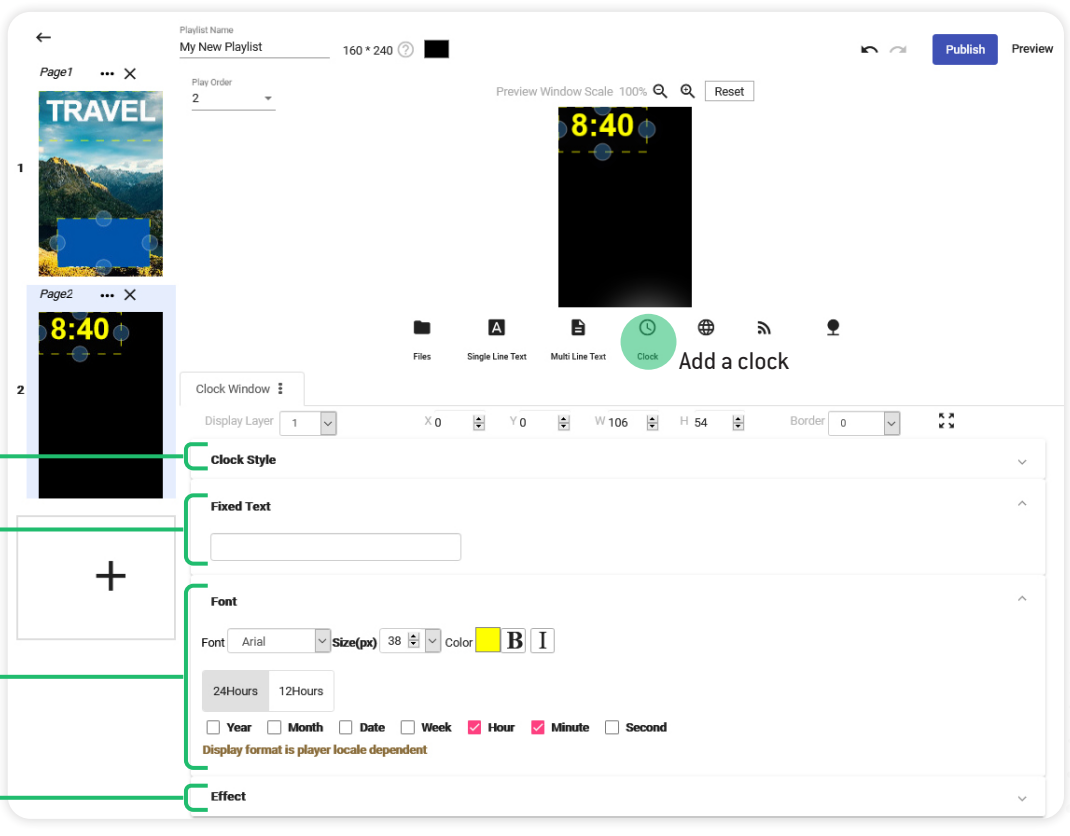

Choose the type of clock

Add a text in front of the clock

Change the font and select elements to be displayed (date, time)

Control display duration and background color

Display a web page (URL)

You can display a web page (URL address) in the sequence cycle. It is essential that your display stays connected to the Internet to display an updated snapshot at each cycle of the playlist.


The rendering of the web page will be adapted to the width in pixels of your window block.

Displaying URLs can be very practical to broadcast web applications (eg: parking space counting system, discounts displayed from your website, ...) or any external data.

Your display uses the coordinates 0-0 (top left corner) as the starting point for the pixel area to be displayed.



The web page will be adapted to the pixel width of your window block in the sequence. It can look very different from what it looks like on a desktop monitor (1920 pixels).

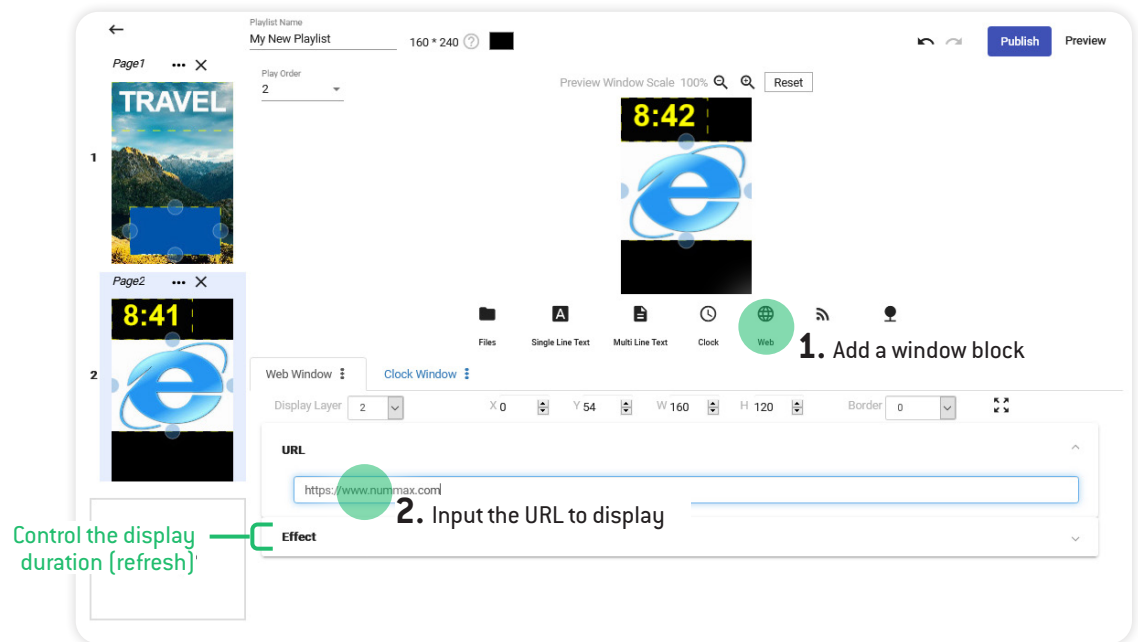


Control the display duration (refresh)

2. Input the URL to display

1. Add a window block

Display RSS feed

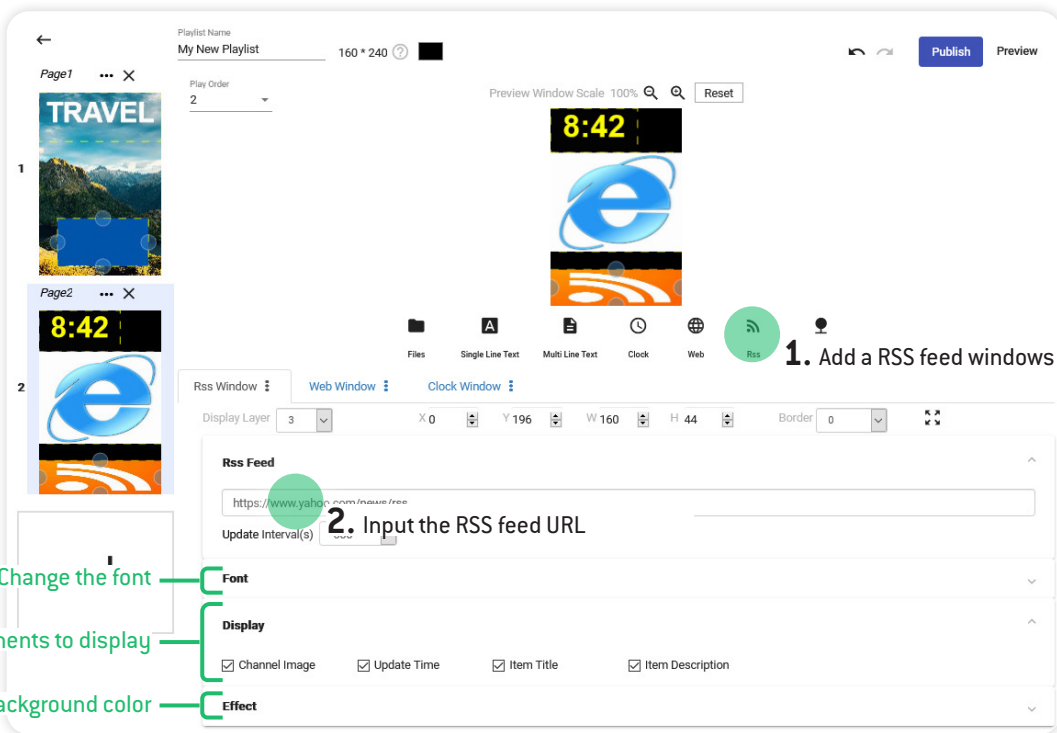

The screenshot shows the Nummax Manager LOCAL interface for creating a playlist named "My New Playlist". The interface includes a preview window on the right showing a clock and RSS feed, and a configuration panel on the left with two pages. Page 1 shows a "TRAVEL" image and a blue RSS icon. Page 2 shows a clock and a blue RSS icon. The configuration panel for the RSS feed includes a text input field for the URL, an "Update Interval(s)" field, and checkboxes for "Channel Image", "Update Time", "Item Title", and "Item Description".

1. Add a RSS feed windows block

2. Input the RSS feed URL

Change the font


Choose elements to display

Control display duration, scrolling, background color

Display environment data

To display information relating to the environment around your display (humidity rate, temperature, smoke level, ...) your system requires the addition of various sensors.

This feature is usually used for outdoor displays.

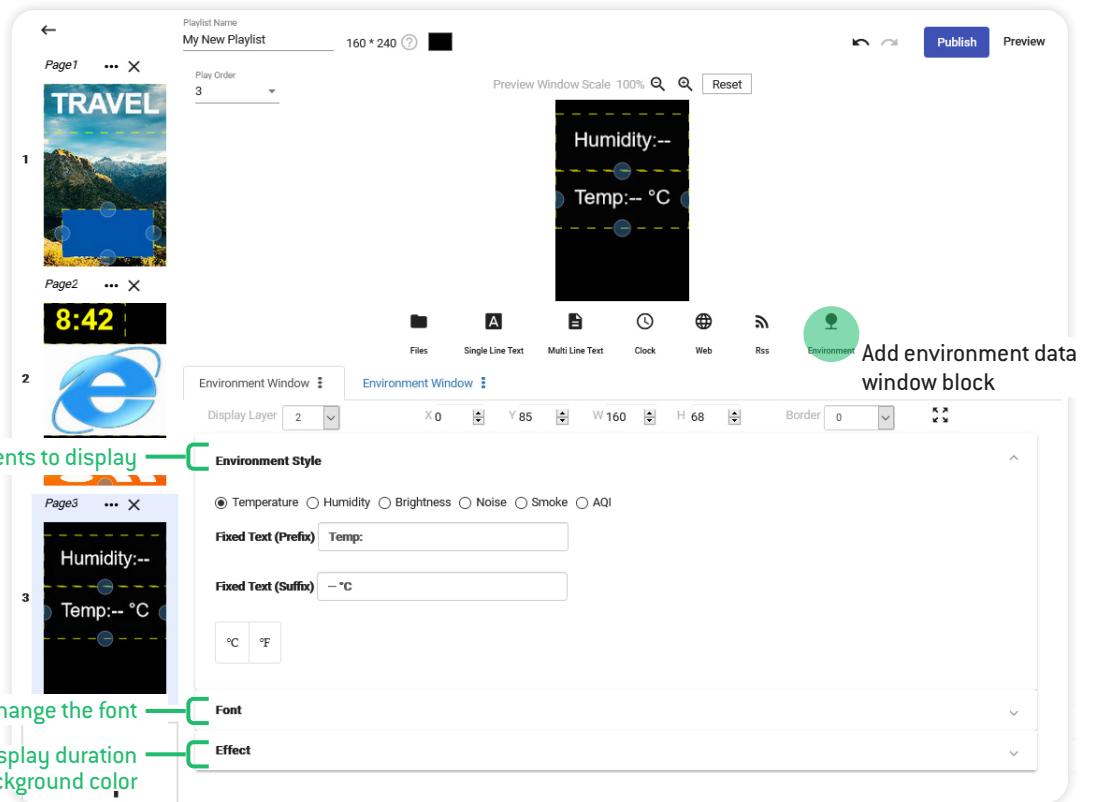

Playlist Name: My New Playlist 160 * 240

Play Order: 3

Preview Window Scale: 100%

Buttons: Publish, Preview, Reset

Environment Window: Environment Window

Display Layer: 2

Environment Style:

- ☒ Temperature ☐ Humidity ☐ Brightness ☐ Noise ☐ Smoke ☐ AQI

Fixed Text (Prefix): Temp:

Fixed Text (Suffix): -- °C

Font: °C °F


Font: [Dropdown]

Effect: [Dropdown]


Callouts:

- Choose elements to display
- Change the font
- Control display duration and background color
- Add environment data window block

When you have finished preparing all your sequences' pages, you can publish your playlist to the display by clicking **Publish**.

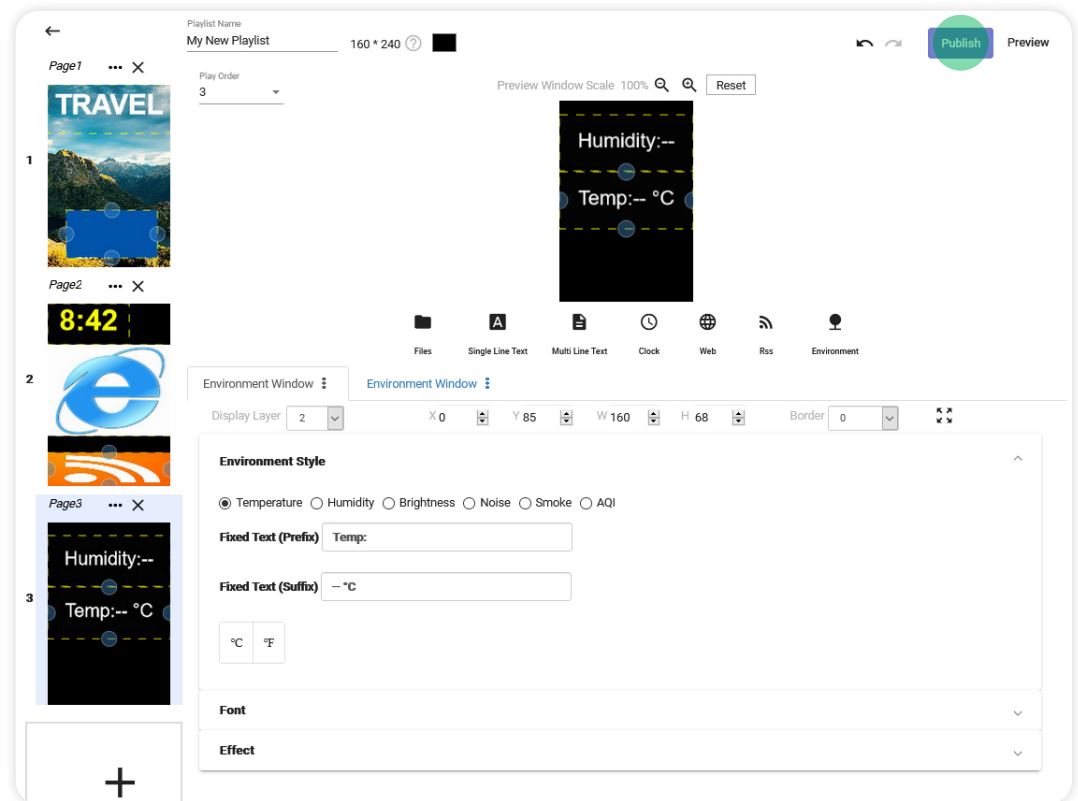

It only takes a few seconds to see your content broadcasted.

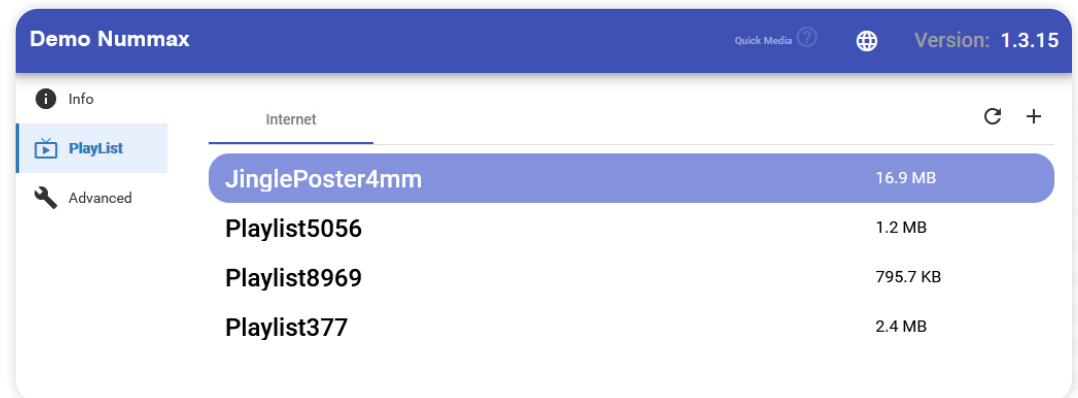

BRIGHTNESS CONTROL

In the **Advanced** section of the software, you access information and settings for your display.

We recommend that you do not change the factory settings in order to maintain your warranty.

Only the brightness can be changed in this section.


Suggested settings :

15% - Night

20-30% - Evening and very cloudy weather

70-85% - Day

80-100% - Bright sunny day

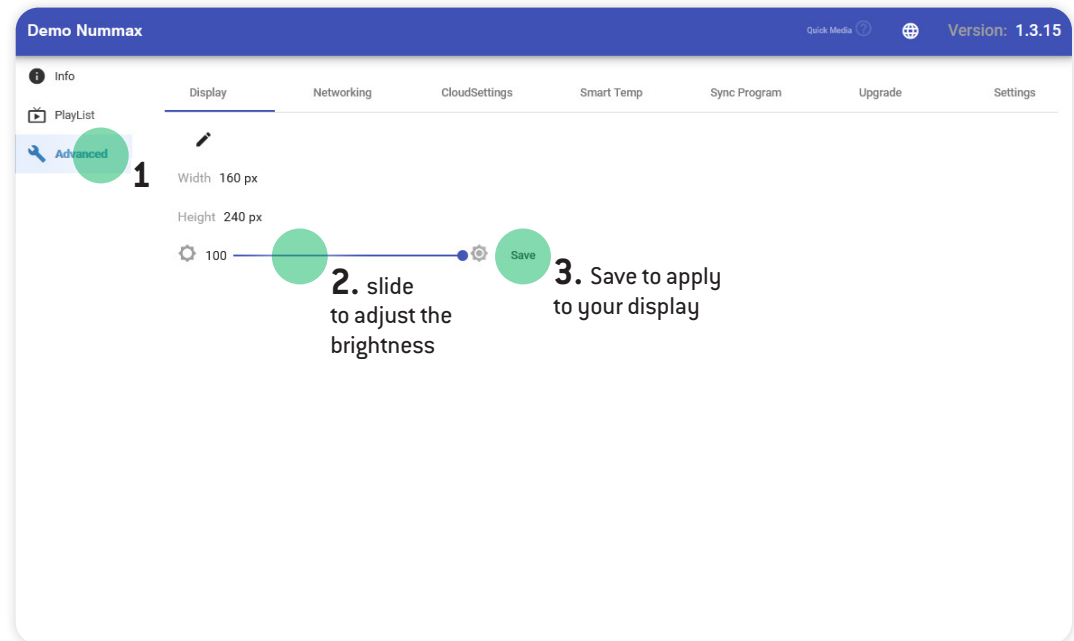

The power consumption of your display is directly related to the brightness. Reduce brightness at night!

Is it possible to save media (images, videos) in the display before publishing them?

No, no media can be temporarily saved in the display's memory. Only current media and playlists are kept in memory. To benefit from storage of your media, choose Nummax Manager AIO (Cloud). Contact Nummax to change your subscription.

Can we put several slideshows in the same sequence page?

Yes. You can put several content window blocks in a single sequence page.

How to schedule content at certain times?

The free Nummax Manager Local software does not benefit from this functionality. Only the AIO (Cloud) version allows programming in a calendar.

How long will each of my sequence pages be displayed?

In a playlist you can create sequence pages. Each sequence page contains content window blocks (slideshow, text, clock, ...). The display duration of the longest element will determine the overall duration of the sequence page. Ex: a sequence page with an image of 15s, a title that scrolls for 20s. The duration of this sequence page will be 20s.

Is it possible to automate brightness changes?

No, only the AIO (Cloud) version allows you to program brightness changes.

Can I access Nummax Manager Local with any device?

Yes, but the device must be able to connect to the display network (from the same local network) and be physically nearby.

Is it possible to display the weather or the local temperature?

No, only the AIO (Cloud) version can integrate the weather content of your city or your area.

I would like to have a media broadcast report to sell advertising spaces and make my Nummax display profitable, what should I do?

The free Nummax Manager Local software does not benefit from this functionality. Only the AIO (Cloud) version allows you to view and download a media broadcast report.

Do I have to change my Nummax display to get the new features?

No need to change your display. Contact us so that we can activate your account (fees may apply).

Is there a library of already existing media that I could use?

The free Nummax library is available on the Nummax Manager AIO (Cloud) version and will give you access to many medias.

**Sales Department**

Our sales department can answer your questions and requests for software and equipment upgrade : 1-877-255-3471 # 204
8:00 am to 4:00 pm EST.

**Technical support**

Contact our technical support for any software and hardware question : 1-877-255-3471 # 205
8:00 am to 5:00 pm EST.



Nummax Manager Local

0\$

1 software per display



Nummax Manager AIO

20\$ /month

1 subscription
per street address

CHOOSE NOW Nummax Manager AIO

- ✓ Multi-display synchronization
- ✓ Media library
- ✓ Programmable playlist and command
- ✓ Marketing report
- ✓ Full display control
- ✓ Customer account management
- ✓ Training and support

And much more...

Send your request to Cloud@Nummax.com
or by phone at 1-877-255-3471





Access from any distant device		✓
Account		
Dashboard		✓
Info		✓
Settings		✓
Subsidiary accounts		✓
Create accounts		✓
Bulk delete		✓
Allocate space		✓
Manage owner account		✓
Manage subsidiary accounts		✓
Manage storage capacity		✓
Terminal		
Details (Language, capacity,...)	✓	✓
Live screen capture	✓	✓
Camera shot (Camera not included)		✓
Display orientation control	✓	✓
Display cropping control		✓
Quick commands		
Sleep	✓	✓
Wake up	✓	✓
Reboot	✓	✓
Color temperature		✓
Audio volume		✓
Brightness		
Master (instant control)	✓	✓
Auto (Optional sensor required)		✓
Network information	✓	✓
Playlist now playing	✓	✓
Playlist in memory	✓	✓
Monitor environmental data (Optional sensors required)		✓
Set alerts		✓
Email alerts		✓



Map		✓
Log (Maintenance)		✓
Marketing statistics		
Display report		✓
Download report		✓
Schedule / Calendar		
Program playlists		✓
Program commands (Brightness, sleep,...)		✓
Content creation		
Media library (Storage drive)		5Go
Media preview		✓
Share media		✓
Create playlists	✓	✓
Create templates		✓
Create pick list		✓
Access Nummax Library		✓
Content		
Images and videos	✓	✓
Single line text	✓	✓
Multi line text	✓	✓
Time	✓	✓
Weather		✓
Web page (URL)	✓	✓
RSS feed	✓	✓
Environment data (Sensors required)	✓	✓
Sync images and videos		✓
Countdown		✓
Preview playlist	✓	✓
Service		
Training		Webinar and videos
Documentation	✓	✓
Software support		✓

Need help creating your marketing content?

Do not search anymore !
Take advantage of our infographic services now.

Contact us to receive our documentation on this subject.
1-877-255-3471 ext 204 | info@nummax.com

