


NUMMAX PRO POSTER

CAPTURE PEOPLE'S ATTENTION,
REEL THEM IN AND REDUCE YOUR COSTS!

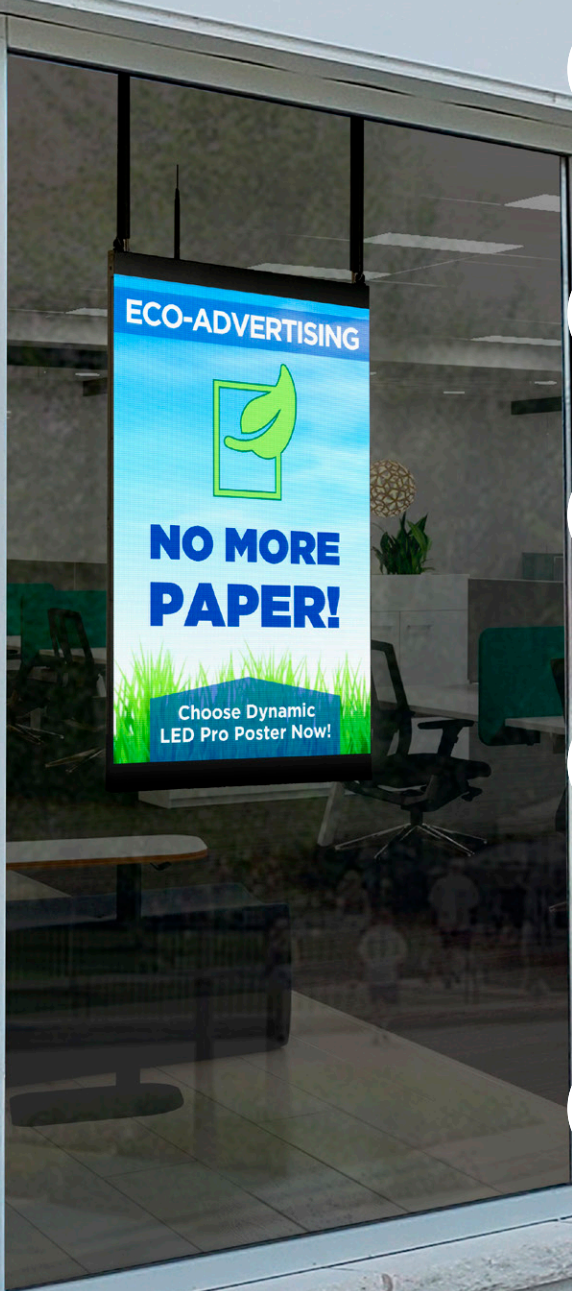

BRIGHTNESS

- Readable on bright sunny days
- Visible through tinted windows
- Visible from 100+ feet away



LOW PRICE

- Quick ROI
- Create source of revenue



PLUG'N'PLAY

- Easy to install
- Multiple display control
- Plug'n'play software



BROADCAST

- Show images, animations and videos
- Create slideshows
- Build your own templates
- Display time, weather, RSS feeds, countdowns and more



ECO-ADVERTISING

- Instant updates and adjustments
- 10 year lifespan
- Consumes less than 2x 100w bulbs

NUMMAX PRO POSTER

Display innovations



Produces no noise and no heat



30 mm thickness (1.18 in)



Easy connection and wiring



Quick installation bracket




Easy to use online management software

Installation



Portrait



Landscape



Juxtaposed



Back to back




Rolling stand

TECHNICAL SPECIFICATIONS

Model	Pro Poster 2.5mm	Pro Poster 2.5mm HB	Pro Poster 4mm HB
LED spacing	2.5mm	2.5mm HB	4mm HB
Pixel resolution (px)	256x384	256x384	160x240
Brightness	1500 nits	3000 nits	5000 nits
Viewing distance	2m	2m	4m
Maximum power consumption	336W	489W	489W
Average power consumption	135W	195W	195W
Pixel			
Display Area	640 x 960 mm / 25,19 x 37,79 po		
Total dimensions (including frame)	640 x 1068 x 30 mm / 25,19 x 42,04 x 1,18 po		
LED configuration	SMD 3:1		
Colour capacity	8 bits		
Refresh rate	1920 Hz +		
Frequency	60 Hz +		
Colour type	RGB		
Viewing angle	H140°, V140°		
Lifetime	100 000 H+		
Power	AC-110-240 V		
Warranty	3 years (swap)		
Compliance	c ETL us		
Working temperature	0/60 °C		
Working humidity	10-80%		
Working environment	Window interior		
Frame	Aluminum / Steel		
Weight	15.5 kg / 35 lbs		
Player	Nummax N1		
Software	Nummax Manager local or cloud (AIO)		
Communication	Wifi / Wired		

Included



Spare module



Free software training



Free local software



Poster swap warranty



Nummax media library Free access