

LED DIGITAL WINDOW (SIGNAGE) NUMMAX-PRO POSTER

CAPTURE PEOPLE'S ATTENTION, REEL THEM IN AND REDUCE YOUR COSTS!



Easy-to-install display network for digital advertising

Designed specifically for storefronts, the window display series broadcasts promotions that people will see from far away, whether it is sunny or cloudy outside. The digital advertising's animations will adapt to ambient lighting according to the hours.

Whether you have a single or multiple store locations, you

can display ads remotely and easily with our Nummax Manager Software. With just a few clicks, change the content of your digital signs or modify ad sequences in all or specific locations.

This LED window digital signage solution is available for outward broadcasting only, or both outward and inward to both grab the attention of potential customers outside while the other facade works on upselling customers already in your establishment.

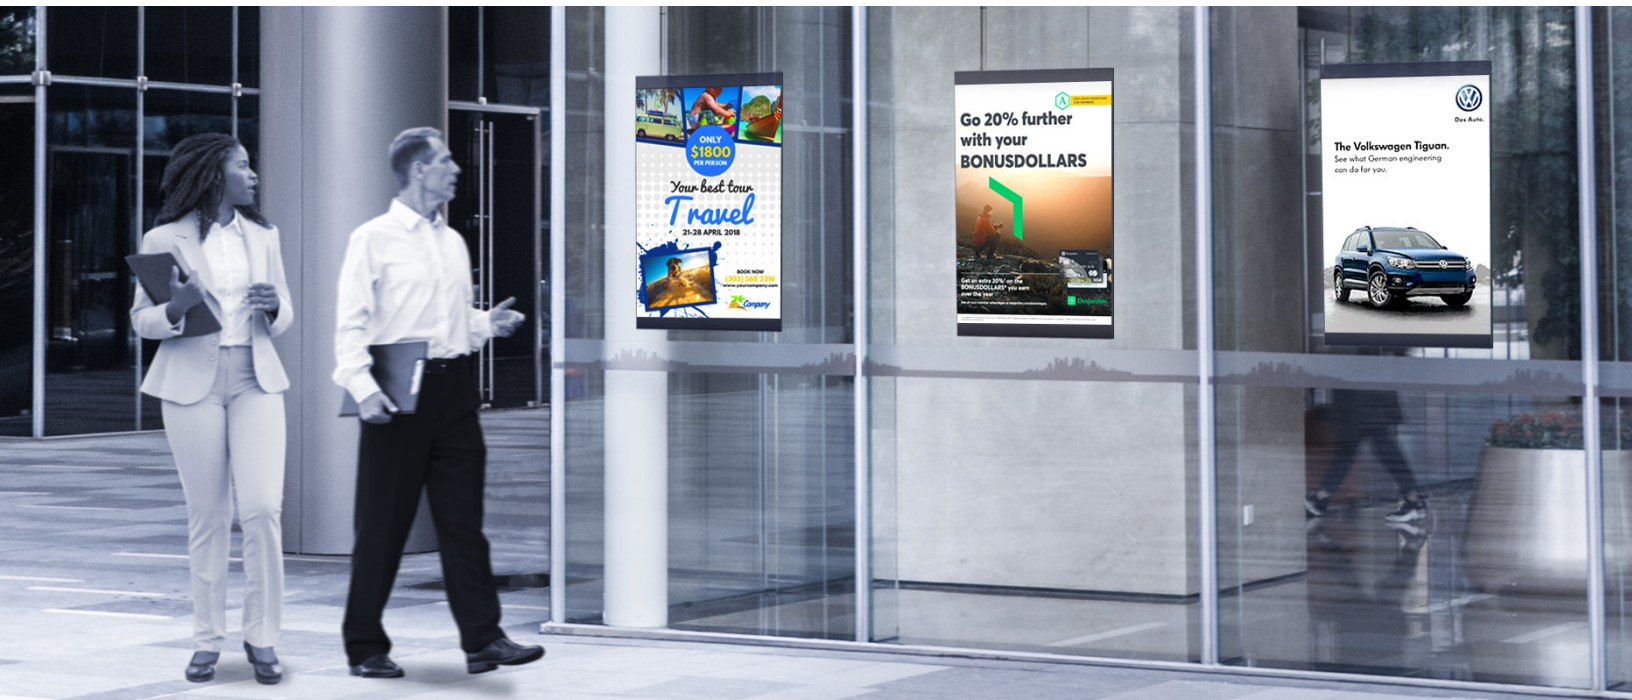

ECONOMICAL

Reduced marketing and printing expenses thanks to the low cost production of unlimited content displayed. Optimize message performance with the tap of a finger.



EFFICIENT

Optimal return on investment with the ability to rapidly see the results of an effective marketing strategy. With digital signage, your messages will have a greater impact than ever before.



ATTRACTIVE AND APPEALING

Powerful, responsive communication made possible through real-time broadcasting of messages.




SIMPLE, FLEXIBLE BROADCASTING


Nummax Manager, our content management software, allows you to schedule your content displayed from a distance in a matter of minutes. With dynamic messaging, pre-program content display times weeks in advance.

TECHNICAL SPECIFICATIONS

Model	Pro Poster 2.5mm	Pro Poster 3mm	Pro Poster 4mm	Pro Poster 5mm	Pro Poster 4mm HB	Pro Poster 5mm HB
Display Area (WxH)	640 x 960 mm / 25,19 x 37,79 po					
Total dimensions (including frame) (WxHxD)	640 x 1068 x 30 mm / 25,19 x 42,04 x 1,18 po					
Stackable	No					
LED spacing	2.5mm	3mm	4mm	5mm	4mm	5mm
LED configuration	SMD 3:1					
Pixel resolution (px)	256x384	212x318	160x240	128x192	160x240	128x192
Colour capacity	8 bits					
Brightness	1500 nits			1200 nits	5000 nits	
Refresh rate	1920 Hz +					
Frequency	60 Hz +					
Colour type	RGB					
Viewing distance	2m	3m	4m	5m	4m	5mm
Viewing angle	H140°, V140°					
Lifetime	100 000 H+					
Power	AC-110-240 V					
Warranty (parts)	3 years					
Compliance	c ETL us					
Maximum power consumption				336W	489W	
Average power consumption				135W	195W	
Working temperature	0/60 °C					
Working humidity	10-80%					
Working environment	Window interior					
Frame	Aluminum / Steel					
Weight	15.5 kg / 35 lbs					
Orientation	Portrait					
Back Frame	Portrait / Landscape / 2 units back to back / 2 units side by side					
Player	Nummax N1					
Software	Nummax Manager AIO					
Communication	Wifi / Wired					
Included	Window installation bracket					

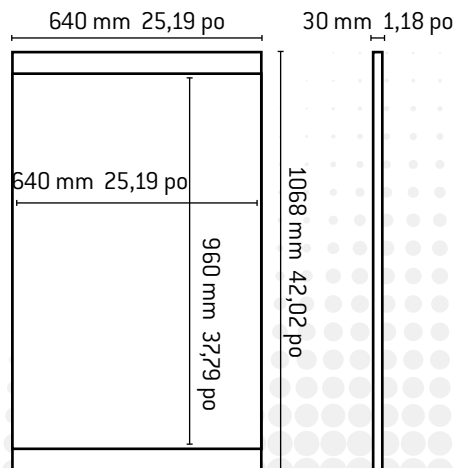

Easy connection



High performance LED



Minimum thickness